

管路迴油過濾器 Spin-On Filters

SP系列過濾器產品齊全，適合應用在吸油和迴油上。

當更換濾蕊時，SP系列過濾器可容易且迅速的更換濾蕊。

SP 過濾器特別為了在油壓和潤滑系統應用時作防污染控制而設計，應用於汽車業、農業和工具機系統。

The spin-on filter series is a complete product range suitable, for both suction and return applications.

Utilizing spin-on canisters, the SP series are quick and easy to service and provide a "clean" solution when changing elements.

SP filter are specifically designed for contamination control in hydraulic and lubrication circuits for mobile applications, agricultural and machine tool systems.



特點：


1. 濾油車專用過濾
2. 油料供給前置過濾
3. 兩側設有污染指示器偵測孔，以便檢測濾蕊使用情況。

Characterization：

1. Special used in oil filtration.
2. Filter forward oil supply.
3. Differential indicators installed each side to check pressure drop.

▶ 過濾器材質 Materials


端部 Head	旁通閥 Bypass
鋁合金壓鑄 Aluminium alloy	工程塑膠 PA-6

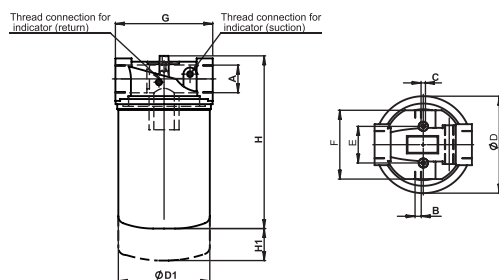

▶ 過濾器壓力 Pressure filter body

最大工作壓力 到 12 bar

Maximum working pressure up to 12 bar

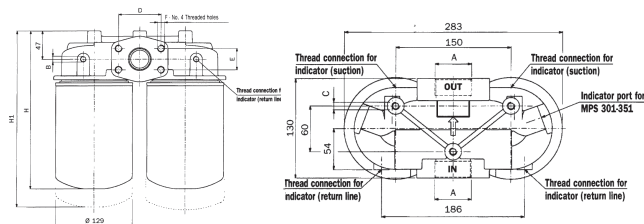

▶ 安裝尺寸及外型尺寸 Install the size and size of appearance

Type	A PT	B PT	C	D mm	D1 mm	G mm	H mm	H1 mm	W Kg	流量 Flow l/min
SP034	3/4"	1/8"	M8	75	96	95	180	20	0.8	55
SP100	1"	1/8"	M8	75	96	95	180	20	0.7	58
SP114	1-1/4"	1/8"	M8	132.5	129	133	240	35	1.7	130
SP112	1-1/2"	1/8"	M8	130	129	M8	240	35	5.4	200

▶ 型號說明 Model code

SP	034	P10
-----------	------------	------------

接續螺紋規格
Connection threaded specification

濾蕊規格 / Filter element

申記企業有限公司

TAIWAN SCHEMIK CORP.

11259 台北市北投區立德路121巷5號

NO.5.Lane 121, Lide Rd Beitou District 11259, Taipei, Taiwan

TEL：+886-2-2894-0500 FAX：+886-2-2894-0554

http://www.schemik.com