

中低壓管路過濾器

Low and Medium Pressure Filters

中低壓管路過濾器採用高強度鋁合金製造，輕巧且不佔空間，具備多項功能及特殊設計：吸迴油共用本體、底部洩油孔設計、壓力指示或過壓保護…等。本產品提供多種過濾材質及精度，以滿足客戶需求。

本產品可適用於不同產業，例如：鋼鐵、造船、橡塑膠機械、齒輪箱及各式潤滑系統，也可使用於建築機械或運輸機械，如混凝土車、挖土機、吊車及起重機。

●流量：max 50 (l/min)

●工作壓力：40 bar

●外殼材質：高強度鋁合金

●重量：FLA G034 重 1.4KG


* 重量不包含濾蕊



中低壓管路過濾器

Low and Medium Pressure Filters

安裝尺寸

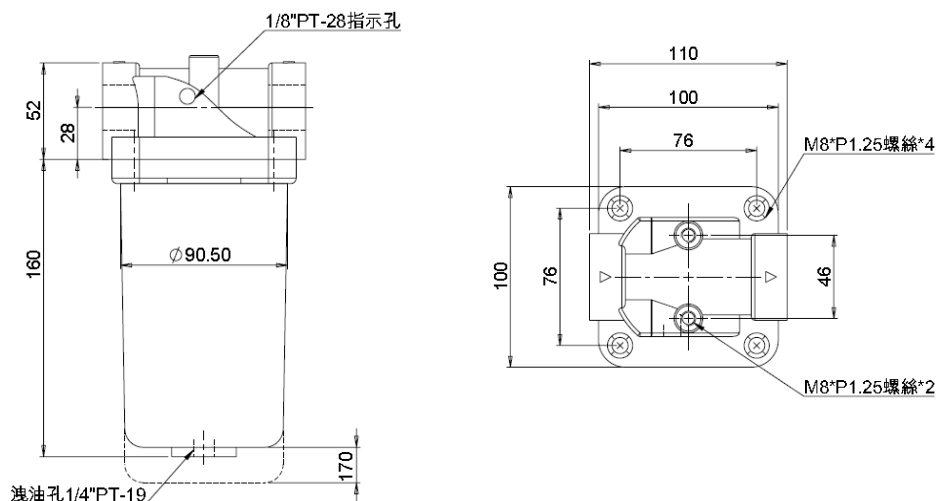

HOW TO ORDER

FLA	P034	-	100M	+	PI	
Thread conn. P034=3/4"PT P100=1"PT			Filter element		指示器	PI 1.5" 埋入壓力計 ES 壓力開關
			玻璃纖維	金屬網	紙網	不織布
			A03	M10	P10	L25
			A06	M25	P25	
			A10	M60		
			A25	M90		
				M250		
				100M		
			EFLA	100M		

<http://www.schemik.com>

Low and Medium Pressure Filters

FLA make by the aluminum alloy. It has many functions and the special design. The main body can use for in-line and return-line system, the base oil drain design, Complete lines of pressure differential visual and electrical indicators are available with this series of filters.


This product suitably in different industry, for example, steel and iron, shipbuilding, oak reverted machinery, gear box and various types lubrication system, may also use in the construction machinery or the transport machinery, like coagulation ballast truck, excavator, crane and hoist crane.

- Flow rate : max 50 (l/min)
- Working pressure : 40 bar
- Materials : Aluminium Alloy

- Weight : 1.4KG / Set
(The weight is not includeing element.)



Low and Medium Pressure Filters

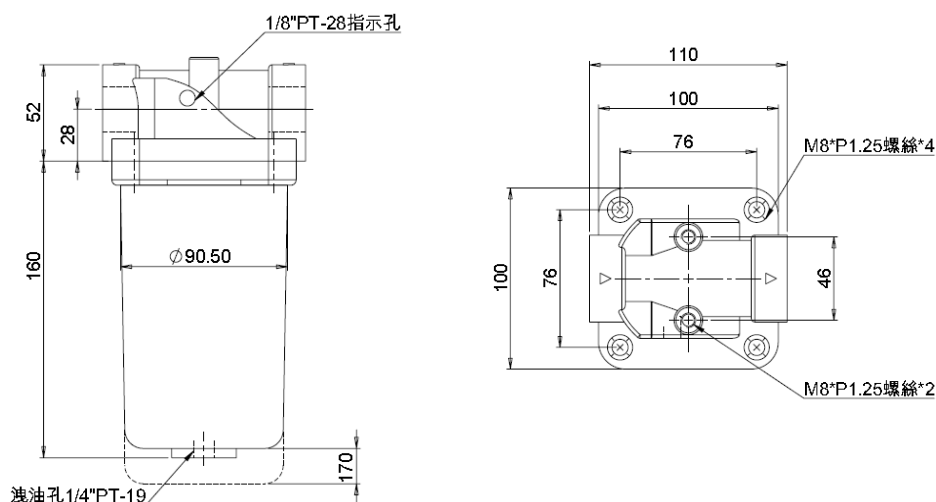

HOW TO ORDER

FLA	P034	-	100M	+	PI	
Thread conn. P034=3/4"PT P100=1"PT			Filter element		Indicator PI	(Pressure gauges)
			Inorganic microfibre	Metal	Resin- impregnated paper	Resin- treated paper
			A03	M10	P10	L25
			A06	M25	P25	
			A10	M60		
			A25	M90		
				M250		
				100M		
			Element: EFLA 100M		ES	(Pressure switch)

<http://www.schemik.com>



TAIWAN SCHEMIK CORP.

No.5, Lane 121, Lide Rd., Beitou District, Taipei City 11259, Taiwan

Tel: 886-2-2894-0500 Fax: 886-2-2894-0554

E-mail: schemik@schemik.com