

## 液位開關

## Level Switches

The electromagnetic level indicators activate an electric signal when the fluid inside the tank reaches a stated level.

The levels from LS / LSB SERIES are available with a 3 fixing holes flange or with a 1" BSP threaded connection, Installs the liquid-level switch in the tank, according to measure the height the liquid the needing of the tank, and when the floats reaches the height the liquid set up. The component in the floats will respond to and start the electronic signal.



### Materials

#### Connector

Plastic material  
(PG9 DIN 43650)

#### Float

NBR  
S.S. 316

#### Flange


Nylon  
S.S. 316

#### Tube

Brass  
S.S. 316

#### Seals

BUNA-N  
VITON

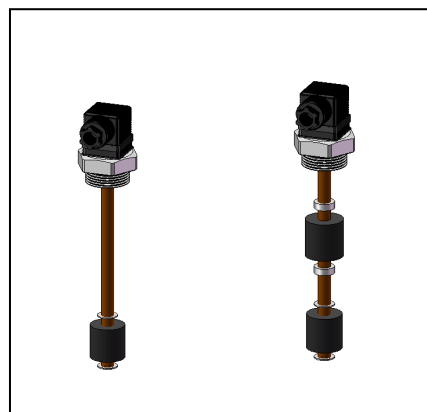

## NEW PRODUCT



## LSX

## Adjustable Length Level Switches

### Materials

#### Connector

Plastic material  
(PG9 DIN 43650)

#### Float

S.S. 316

#### Tube

S.S. 316

#### Flange

Aluminium

Level length can  
Adjustment by  
customer request.

<http://www.schemik.com>



TAIWAN SCHEMIK CORP.

No.5, Lane 121, Lide Rd., Beitou District, Taipei City 11259, Taiwan

Tel: 886-2-2894-0500 Fax: 886-2-2894-0554

E-mail: [tspd001.v01@schemik.com](mailto:tspd001.v01@schemik.com)