

AB 系列之空氣濾清器適用於油箱吸排氣用，目的為保持油箱內壓力與大氣壓力相同。藉由過濾精度 25 Micro 濾蕊，可防止污染物從外部進入油箱內，確保油箱內液壓油的清潔。

The Air Breather filter of AB series can keep in tank the pressure is equal to atmospheric pressure, maintain the normal operation of the oil pressure system. Strain by filtering precision 25 Micron, can prevent the filth from the outside, keep the cleanliness of the hydraulic oil in the tank.



特點：

- 1.不織布濾蕊，耐濕防潮不變形。
- 2.大過濾面積，高效率過濾。
- 3.雙層金屬網夾層強化濾網。
- 4.多種過濾精度濾蕊提供。
- 5.另可充當注油器使用，一物兩用，經濟實惠。
- 6.法蘭形式方便安裝，節省管料和焊接，避免焊接不全，產生溢出。

Characterization :


1. Resin-treated paper endure steam and avoid deformed.
2. Large flow rate and large capacity of filtrate.
3. Outer and inner support meshpress from both sides stronger filter .
4. Provide plenty types of elements.
5. Can serve as filler another,a thing is dual-purpose, economical and practical.
6. Flange easy installation, saving material and pipe welding, avoid welding incomplete overflow.

► 安裝尺寸及外型尺寸 Installation size and dimensions

牙口式 (Thread Type)

單位 (Unit) : mm

| Model NO. | A(PT) | Ø B | C | Ø D | E | F | A/F |
|---------------|--------|-----|-----|-----|-----|----|-----|
| AB034T | 3/4" | 122 | 105 | 118 | 62 | 34 | 38 |
| AB100T | 1" | 122 | 105 | 118 | 62 | 34 | 38 |
| AB112T | 1-1/2" | 150 | 135 | 136 | 84 | 37 | 55 |
| AB200T | 2" | 150 | 140 | 136 | 84 | 37 | 65 |
| AB212T | 2-1/2" | 189 | 180 | 165 | 122 | 47 | 90 |
| AB300T | 3" | 189 | 180 | 165 | 122 | 47 | 90 |
| AB400T | 4" | 235 | 225 | 203 | 160 | 58 | 122 |

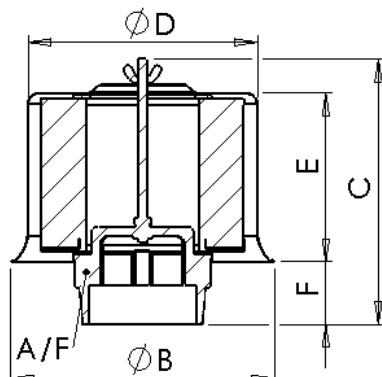

申記企業有限公司

TAIWAN SCHEMIK CORP.

11259 台北市北投區立德路121巷5號

No5,Lane 121,Lide RD.,Beitou District, Taipei 11259 ,Taiwan

TEL:+886-2-2894-0500 FAX:+886-2-2894-0554

<http://www.schemik.com>


► 安裝尺寸及外型尺寸 Installation size and dimensions

法蘭式 (Flange Type)


單位 (Unit) : mm

| Model No. | A | B | ØC | ØD (PCD) | ØD1 | E | ØF 建議挖孔尺寸 |
|---------------|-----|-------|-----|----------|-----|----------------|-----------|
| AB112F | 150 | 243±5 | 150 | 85 | 100 | M8 x P1.25 x 3 | 57 |
| AB200F | 150 | 243±5 | 150 | 85 | 100 | M8 x P1.25 x 3 | 69 |
| AB212F | 200 | 331±5 | 189 | 113 | 128 | M8 x P1.25 x 4 | 85 |
| AB300F | 200 | 331±5 | 189 | 113 | 128 | M8 x P1.25 x 4 | 98 |
| AB400F | 250 | 412±5 | 235 | 165 | 180 | M8 x P1.25 x 6 | 123 |
| AB500F | 250 | 412±5 | 235 | 165 | 180 | M8 x P1.25 x 6 | 150 |


請注意 PCD 以及建議挖孔尺寸。

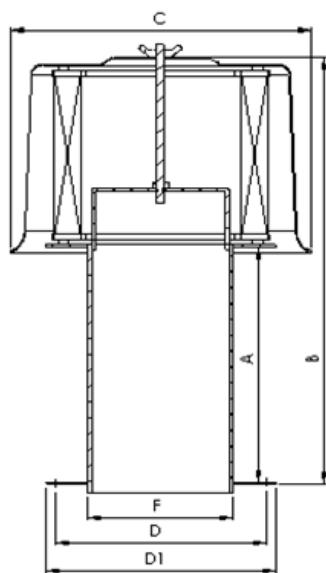


AB112F/200F



AB212F/300F



AB400F/500F



► 型號說明 Model code

| | | | |
|-----------|------------|----------|------------|
| AB | 034 | T | L25 |
|-----------|------------|----------|------------|

↓
型號 Model No.

↓
接續規格

Connection threaded specification

↓
形式 Type :

T : 牙口式 Thread type

F : 法蘭式 Flange type

W: 焊接式 Welding type
(另詢 Another inquiry)

↓
濾網規格 Filter element :

L25 標準規格 Standard element

*另詢其它規格
(Other specifications Inquiry)

申記企業有限公司

TAIWAN SCHEMIK CORP.

11259 台北市北投區立德路121巷5號

No5,Lane 121,Lide RD., Beitou District, Taipei 11259 ,Taiwan

TEL:+886-2-2894-0500 FAX:+886-2-2894-0554

<http://www.schemik.com>