

消泡器 Diffusers Filter

DF系列消泡器可減少油箱注油時所產生的氣泡，因為有氣泡容易發生油箱油溫過高的現象，故加裝消泡器，可避免泵浦運作時吸入空氣，減少停機次數。

DF series diffusers are available for foaming and noise reduction in tanks. The DF series are suitable to avoid the hydraulic pump and other oil pressure spare part and for air suction.

特點：

- 1.上下蓋與濾網採膠合方式製作，濾網完全不變形，達到100%過濾效果。
- 2.較大過濾面積，延長清洗更換週期。
- 3.接頭與上蓋一體成型，絕不斷裂。
- 4.專利上下蓋卡榫設計，絕不脫落。
- 5.中管採用高強度工程塑膠材質，提供強韌支撐。
- 6.提供多種尺寸、過濾精度濾網。

材質：

上下封蓋：高強度，耐油耐腐蝕工程塑膠
支撐中管：高強度，耐油耐腐蝕工程塑膠
外部支撐中管：鍍鋅鋼板
濾網：不鏽鋼，100 Mesh



Characterization：

- 1.Elements glue to caps tightly, enhanced efficiency of filtrating.
- 2.Larger filtering area extends replacement cycle.
- 3.Caps shaped with connections, not likely cracking.
- 4.Patent design of locked caps, not likely came off.
- 5.Support tube by Nylon-6 provides strong support.
- 6.Provide plenty of sizes and elements.

Material：

Connections & End cap：Nylon-6
Support tube：Nylon-6
Support tube-outside：Galvanized steel
Element material：Stainless Steel, 100 Mesh

► 安裝尺寸及外型尺寸 Mounting size


型式編號 Model code		A	φ D	H	CH	過濾精度 Filtration accuracy
Type	Model	PT	mm	mm	mm	Mesh
DF	012	1/2"	60	142	40	100
	034	3/4"	60	142	40	100
	100	1"	70	187	50	100
	114	1-1/4"	70	187	50	100
	114A	1-1/4"	100	225	70	100
	112	1-1/2"	100	225	70	100
	200	2"	100	225	70	100
	200A	2"	130	270/330	100	100
	212	2-1/2"	130	270/330	100	100
	300	3"	130	270/330	100	100

► 型號說明 Model code

DF	012	100M
----	-----	------

接續螺紋規格
Connection threaded specification

濾蕊規格 / Filter element

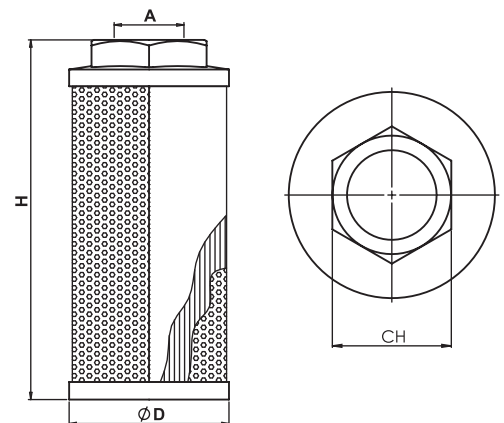

申記企業有限公司

TAIWAN SCHEMIK CORP.

11259 台北市北投區立德路121巷5號
No.5, Lane 121, Lide RD., Beitou District, Taipei 11259, Taiwan.
TEL：+886-2-2894-0500 FAX：+886-2-2894-0554
<http://www.schemik.com>